



OVERHEAD 1 PHASE METER BASE 120/240 VOLT



3W 1 ϕ 120/240 VOLT SERVICE

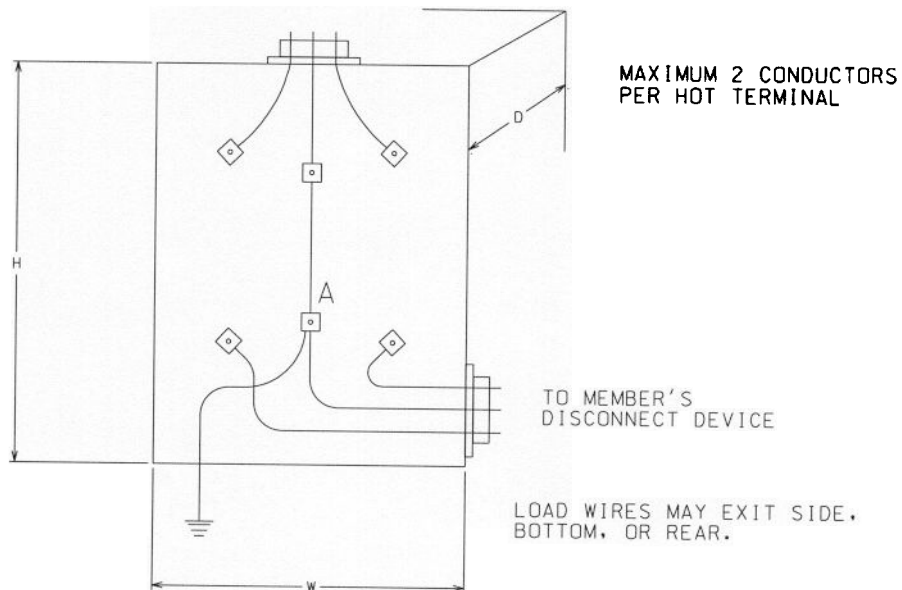

ALL DIMENSIONS
ARE NOMINAL

- | | |
|-----------------------|--|
| 100 AMPERE METER BASE | H=10", W=8", D=3 ⁵ / ₈ ", HUB=1 ¹ / ₄ "
MAXIMUM WIRE SIZE 2/0
MINIMUM WIRE SIZE 6 |
| 200 AMPERE METER BASE | H=14", W=8", D=4 ³ / ₈ ", HUB=2"
MAXIMUM WIRE SIZE 250MCM
MINIMUM WIRE SIZE 6 |
| 320 AMPERE METER BASE | H=26", W=16 ¹ / ₄ ", D=5 ¹ / ₂ ", HUB=3"
MAXIMUM WIRE SIZE 600MCM
OR PARALLEL 350 MCM
MINIMUM WIRE SIZE 6 |

NOTE: NO. 6 COPPER- CONTINUOUS GROUND WIRE
FROM METER BASE (CONNECTION "A") TO GROUND ROD.